



SR-710

Ultra-compact, Fixed type Code Reader



*Please note that accessories depicted in the image are for illustrative purposes only and may not be included with the product.

Specifications

Model			SR-710
Type			Middle-range type
Laser pointer	Light source		Visible semiconductor laser (Wavelength : 660 nm)
	Output		60 μ W
	Pulse duration		200 μ s
	Laser class		Class 1 Laser Product (IEC60825-1, FDA (CDRH) Part 1040.10*1)
Lighting	Light source		High intensity red LED
Reading	Supported code	Barcode	CODE39, ITF, 2of5 (Industrial 2of5), COOP 2of5, NW-7 (Codabar), CODE128, GS1-128, GS1 DataBar, CODE93, JAN/EAN/UPC, Trioptic CODE39, CODE39 Full ASCII, Pharmacode
		2D code	QR, MicroQR, DataMatrix (ECC200), GS1 DataMatrix, PDF417, Micro PDF417, GS1 Composite (CC-A, CC-B, CC-C)
	Minimum resolution	Barcode	0.127 mm 0.005"
		2D code	0.19 mm 0.008"
	Reading distance (typical examples)	Barcode	45 to 195 mm 1.77" to 7.68" (Narrow bar width = 0.5 mm 0.02")
		2D code	45 to 165 mm 1.77" to 6.50" (Cell size = 0.5 mm 0.02")
	Focal distance		100 mm 3.94"
	Field of view (Typical example at focal distance)		70 mm $\times$ 45 mm 2.76" $\times$ 1.77"
I/O	Control input		2 inputs (IN1 and IN2), non-voltage input (contact, solid-state)
	Control output		4 NPN open collector outputs (OUT1 to 4) 30 mA or less (24 V or less) Residual voltage 0.8 V or less, leakage current 0.1 mA or less
	RS-232C	Transmission speed	9600, 19200, 38400, 57600, 115200 bps
		Supported protocol	No-protocol, MC protocol, SYSDWAY, KV STUDIO
	USB		USB 2.0 Full Speed compliant
Rating	Power voltage		5 VDC +5 %, -10 %
	Current consumption		630 mA or less
Environmental resistance	Enclosure rating		IP65
	Ambient light		Sunlight: 10,000 lux, Incandescent lamp: 6,000 lux, Fluorescent lamp: 2,000 lux
	Ambient temperature		0 to +45 $^{\circ}$ C 32 to 113 $^{\circ}$ F
	Relative humidity		35 to 95 % RH (No condensation)
	Storage temperature		-10 to +50 $^{\circ}$ C 14 to 122 $^{\circ}$ F (No freezing)
	Operating environment		No dust or corrosive gases present
	Vibration resistance		10 to 55 Hz, Double amplitude 1.5 mm 0.06", 3 hours in each of the X, Y, and Z directions

Weight


Approx. 160 g (including cable)

*1 The laser classification for FDA (CDRH) is implemented based on IEC60825-1 in accordance with the requirements of Laser Notice.

Dimensions


* Download CAD file or product manual for larger image/text and more detail.

sr-700_710_700ha_dimension_01.gif

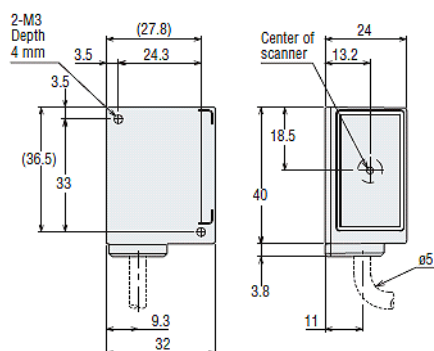

sr-700_710_700ha_dimension_02.gif

MOUNTING BRACKET

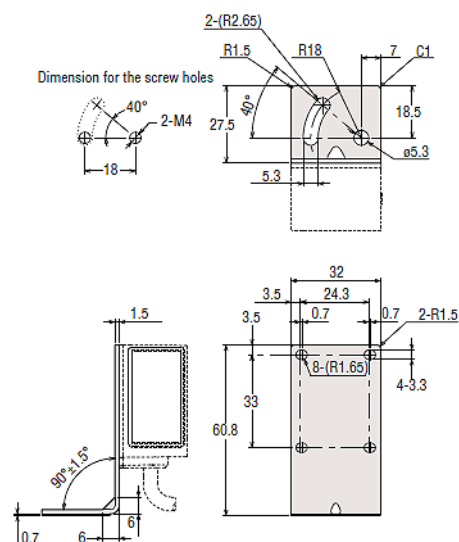

sr-700_710_700ha_dimension_03.gif

HEAD CABLE

